




Single Gas Clip

Whether it's the hottest environment or the coldest, our Single Gas Clip (SGC) is designed and tested to provide worker safety in the harshest working conditions.

At Gas Clip Technologies, we enhance customer safety by using the latest technology. We test 100% of our portable

gas detectors, not just a random sample of units. That's why we can offer a low cost of ownership on our gas detectors.

There are no hidden service charges, no maintenance fees—just reliable units that will help your facility workers and contractors do their jobs safely, productively and cost effectively.

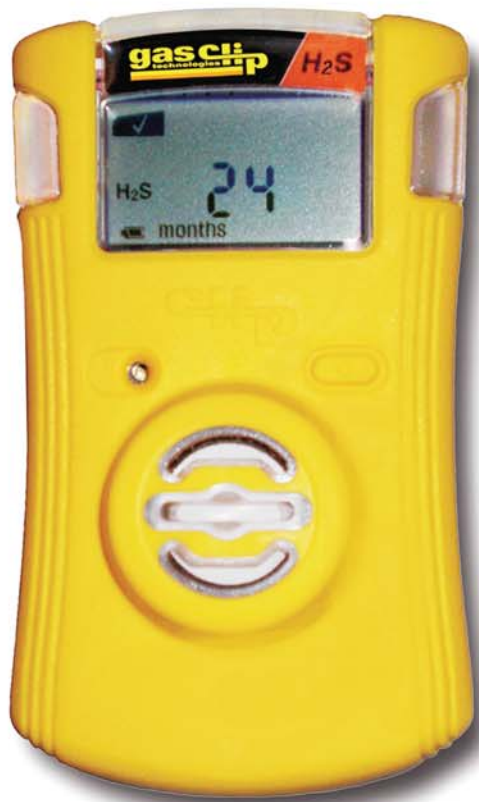

- ▶ Unmatched sensor reliability for H₂S, CO or O₂
- ▶ Adjustable alarm set points and real-time gas reading capability
- ▶ 50% larger battery capacity
- ▶ 0.1 ppm resolution for H₂S sensor and display
- ▶ Two-way IR comms for event downloads, bump tests & updates
- ▶ Programmable unit identification
- ▶ "Bump check" confirmation/identification

For unmatched safety, reliability and productivity, choose the world's most advanced single gas detector, the Single Gas Clip.

gas clip
technologies

Portable gas detectors you can count on.

www.gascliptech.com ♦ Toll Free: 877.525.0808



SGC Dock






SGC Wall Mount Dock



GCT IR Link

Specifications

Size	85.6 mm H x 50 mm W x 29.2 mm D 3.37 in H x 1.97 in W x 1.15 in D
Weight	76g 2.7 oz
Temperature	H ₂ S: -40°C to +50°C/-40°F to +122°F CO: -40°C to +50°C/-40°F to +122°F O ₂ : -35°C to +50°C/-31°F to +122°F
Humidity	5% to 95% non-condensing relative humidity
Alarms	Visual, vibrating, audible (minimum 95dB)
Tests	Full function self-test on activation and every 20 hours; continuous automatic battery tests
Operational Life	Two years
Ratings	EMC Directives 2004/108/EC IP 67
Certifications	Standard(s): UL-913 & CAN/CSA-C22.2 No. 157 Class 1 Divisions 1 & 2, Groups A, B, C and D
	ETL CLASSIFIED  Intertek 4003191  
ATEX: II 1 G Ex ia IIC T4	
IECEX: EX ia IIC T4	
Warranty	2 years from activation 1 year shelf life
H₂S	Measuring range: 0-100 ppm Low alarm limit: 10 ppm High alarm limit: 15 ppm
CO	Measuring range: 0-300 ppm Low alarm limit: 35 ppm High alarm limit: 200 ppm
O₂	Measuring range: 0-30% Low alarm limit: 19.5% High alarm limit: 23.5%
NOTES	Real-time gas display or time remaining; Calibration optional; Adjustable alarm set points and bump check reminder



Portable gas detectors you can count on.

www.gascliptech.com ♦ Toll-free: 877.525.0808

2010-2014© Gas Clip Technologies, Inc. All Rights Reserved.

Distributed By:



MICROWATT
Making Safety Work

Tollfree in Western Canada: 1-888-388-1592
microwatt.com • mwsales@microwatt.com