

TelCom® Telephone Extension Ringer Device

Model TELB

DESIGNED FOR USE WITH A TELEPHONE

- Available in 120VAC
- Bell signals an incoming call
- Activated by ringing voltage (analog telephone only)
- Type 1 enclosure
- CSA Certified
- FCC Approved
- UL Listed for indoor use

Federal Signal's TELB TelCom® Extension Ringer Device is a vibrating bell which is activated by the ringing signal of a telephone system. The TELB is specifically designed for use with an analog telephone. The ringing signal of 40-150VAC, 16-60Hz and local 120VAC power is all that is required to activate a TelCom signal.

This TelCom device is intended to be mounted on a vertical surface such as a rigid wall or post. The TELB has a three-conductor six-foot, 120VAC power cord extending from the unit. Connecting the TelCom device to the telephone network is done by running a modular telephone line cord (RJ11) to an existing jack or a duplex jack (customer supplied) into an existing modular jack. The TELB is designed with a durable zinc die-cast housing painted with gray powder coat enamel, and features an internal solid-state relay.


Telcom devices are designed for high ambient noise areas such as manufacturing facilities, machine and sheet metal shops. They are also useful in large open areas such as a warehouse, loading dock, or a large office.

This four-inch bell produces a 98dB signal @ 10' (108dB @ 1m).

		Operating	Decibels @	
Model	Voltage	Current	10'	1m
TELB	120VAC	0.08 amps	98	108



TELEPHONE EXTENSION RINGER DEVICE (TELB)

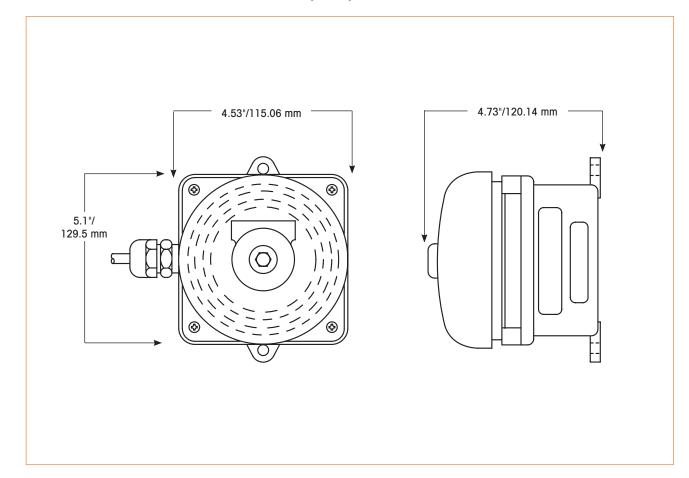

SPECIFICATIONS

Operating Temperature: 32°F to 112°F 0°C to 44°C Ringing Signal: 90VAC, 20Hz 90VAC, 20Hz Ring Detection: 15.8-60Hz, 40-150VAC

Humidity Range

(Storage and Operating): 0 to 85% R.H, noncondensing FCC Ringer Equivalence Number (REN): 1.0B Net Weight: 2.6 lbs. 1.18 kg Shipping Weight: 3.2 lbs. 1.45 kg Height: 5.1" 129.5 mm Width: 4.53" 115.06 mm Depth: 4.73" 120.14 mm

HOW TO ORDER

· Specify model number



microwatt.com • mwsales@microwatt.com