



Continuously measure Furnace Exit-Gas Temperature (FEGT) using Non-Contact Infrared Sensors to optimize overall performance of boilers and furnaces under varying conditions of coal quality, load, ash fouling, and slagging

# FEGT

- Prevent failures by proactively monitoring the furnace temperature
- Determine precisely when to perform sootblowing
- Set trigger alarms to take quick corrective actions when gas temperatures approach slagging/fouling limits with continuous online monitoring



- Measure and quantify trade-offs of heat rate and NO<sub>x</sub> and SO<sub>2</sub> emissions
- Optimize heat transfer by controlling FEGT under varying conditions
- Prevent unwanted slag accumulation at inlet pendants by controlling FEGT below ash fusion temperatures
- Reduce down time due to failures by proactive monitoring
- Easily installed and maintained while boiler is online

LumaSense Technologies is a world leader in sensing solutions, with over 50 years of temperature and gas sensing expertise in various industries. LumaSense is well established in infrared temperature measurement developed by years of research and customer contact.

Our IMPAC pyrometers are temperature measurement instruments that operate on the principle of infrared radiation, i.e. they detect infrared radiation of objects to determine the temperature.

In many combustion processes, one of the main combustion gases is CO<sub>2</sub>. Therefore, measuring the  $CO_2$  gas temperature is a reliable measurement of the combustion temperature.

Our combustion monitoring solution is a cost effective system that utilizes the IPE 140/45 pyrometer. This is a pyrometer specifically designed for reliable "non-contact" temperature measurement of hot combustion gas containing  $CO_2$ .

The system is easy to install and maintain even while the boiler is online. It allows for quick reaction to undesirable conditions with continuous online monitoring of the combustion temperature. LumaSense's FEGT solution includes:

- Infrared Temperature Sensor
- Protective Sealed Jacket Assembly
- Protective Cooling Jacket
- Vortex Air Cooler
- Removable CaF<sub>2</sub> Window Assembly (Window Slide)
- Air Purge Assembly
- Extended Site Tube
- Mounting Flange (Ball Flange)
- Air Filter for Vortex Air Cooler

## **Technical Data**

Infrared	Thermometer
marcu	memorieler

Temperature Range	400 to 2000 ° C (MB 20)	
Spectral Range	$CO_2$ absorption band for hot $CO_2$ gas	
Uncertainty (T <sub>amb.</sub> = 25 °C, ε=1, T <sub>90</sub> =1s)	Up to 1300 °C: 0.6% of reading in °C Above 1300 °C: 0.8% of reading in °C	
Repeatability	0.1% of reading in °C + 1 °C	
Resolution	interface and display: 0.1 °C, analog output: < 0.03% of temperature range	
Analog output	linear 0 to 20 mA or 4 to 20 mA, DC, switchable; load max. 500 Ohm	
Power Supply	24 VAC/DC (14 to 30 VAC/DC) (AC: 48 to 62 Hz)	
Power Consumption	6 VA	
Protective Housing Stainless steel enclosure with vortex air cooling (air only required for long-term monitoring)		
IP Rating (pyrometer)	IP65 (DIN 40 050)	

75 °C (into cooler)
90 °C
approx. 6 kg
5 μm filter
0 to 53 °C at pyrometer housing
-20 to 60 °C
Non condensing conditions
208-25-HSS
Stainless Steel
1/4 inch
440 Watts
708 slpm / male inlet

Note: The pyrometer is able to measure hot combustion gas (with typically approx. 10% CO<sub>2</sub>) with a thickness of 40 cm.


## Optics

The pyrometers are available with different focusable optics. They offer the smallest possible spot size at any distance. The adjustment can be done easily without additional tools with help of the "turn and clamp" mechanism (one hand). The spot sizes are shown in the following table (all distances are measured from the front of the lens).

The different optics are exchangeable without recalibration of the pyrometer. For spot sizes between those in the table, values can be found by interpolation.


	Measuring Distance a [mm]	Spot Size <i>M<sub>90</sub></i> [mm]	Objective Length S [mm]
	115	1.1	26
<b>Optics 1-PE</b>	135	1.3	13
	170	1.6	0
	210	1.8	26
Optics 2-PE	280	2.6	13
	500	4.9	0
	360	3	26
Optics 3-PE	625	5.6	13
	2000	20	4
	10000	100	0

# System Schematic

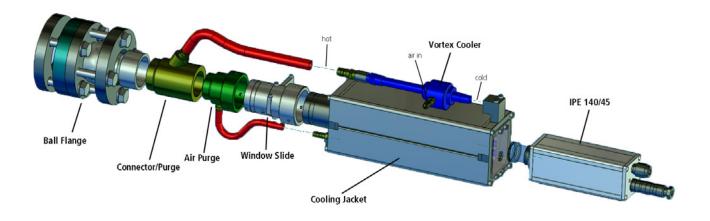

# FEGT & BoilerSpection System Configuration

The FEGT system can be integrated directly into a plants control system or as part of a more complete solution, e.g. in combination with the LumaSense BoilerSpection system as shown here.

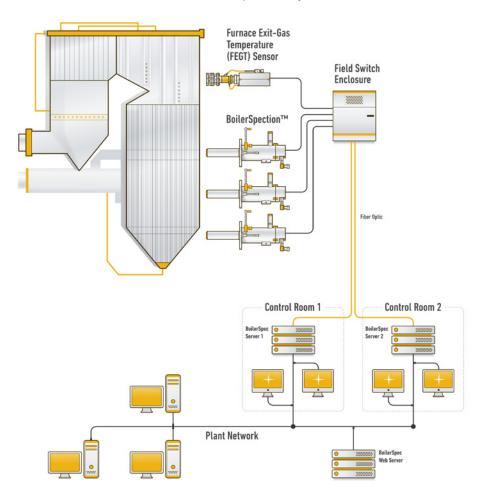

## Ordering and Configuration Details

#### **Complete System**

For a complete system, a minimum of three components must be ordered:

- Pyrometer (IPE 140/45) •
- FEGT Housing Assembly
- Connection Cable -• recommended is a high temperature cable with straight connector

In addition, a power supply for the pyrometer is needed. It is powered by a voltage of 24 V (14 to 30 V) DC or AC (48 to 62 Hz).

### **Service Offerings**

- Installation and commissioning
- Preventative maintenance
- Training
- Extended warranty

#### **Available Documentation**

For FEGT System:

- Manual
- Application Note
- Datasheet

#### For BoilerSpection:

- Datasheets
- Manuals
- Poster/eBook
- Application Notes

## **Reference Numbers**

3 875 880	IPE 140/45, MB 20, 400 to 2000 °C, laser targeting, focusable optics	
3 875 890	IPE 140/45, MB 20, 400 to 2000 °C, through lens sighting, focusable optics	
3 821 270	Electrical connection cable high temperature, 10 m, with straight plug	
3 837 520	FEGT air cooling jacket for Series 140, Includes: vortex air cooler, tube, ball flange, air filterin system, window slide, $CaF_2$ window, hoses (for purge air flow within system)	

### Accessories

3 852 290	Power supply NG DC, 24 VDC, 1 A, for	<sup>r</sup> C/Z-carrier rail mounting, Input 100 to 240 VAC
-----------	--------------------------------------	--

- 3 852 540 Power supply NG 0D; 85 to 265 VAC, 24 VDC 600 mA
- Power supply NG 2D; 85 to 265 VAC, 24 VDC 600 mA, with dual limit switch 3 852 550

#### LumaSense Technologies

Americas and Australia Sales & Service Santa Clara, CA Ph: +1 800 631 0176 Fax: +1 408 727 1677

Europe, Middle East, Africa Sales & Service Frankfurt, Germany Ph: +49 69 97373 0 Fax: +49 69 97373 167

### India Sales & Support Center

Mumbai, India Ph: +91 22 67419203 Fax: +91 22 67419201

#### Awakening Your 6<sup>th</sup> Sense

China Sales & Support Center Shanghai, China

Ph: +86 21 5882 2277 Fax: +86 21 5887 0077

www.lumasenseinc.com

info@lumasenseinc.com LumaSense Technologies, Inc., reserves the right to change the information in this publication at any time.

©2013 LumaSense Technologies. All rights reserved. FEGT-Datasheet-EN Rev. 03/20/13